


接线图Wiring diagram:

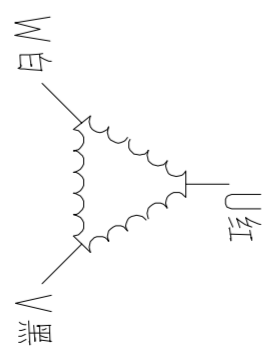

技术要求:
1, 前盖加绑紧螺母
2, 黄绿色线为接地线

PIN NO#	DESCRIPTION	COLOR(颜色)	DESCRIPTION	COMMON RATINGS
PIN1	GND	BLACK(黑色)	POWER 0V DC	1.2°
PIN2	VCC	RED(红色)	POWER 5V DC	1.8° ± 0.09°
PIN3	PA+	YELLOW(黄)	ENCODER A PLUS	2
PIN4	PA-	GREEN(绿)	ENCODER A MINUS	80° C
PIN5	PB+	BLUE(蓝)	ENCODER B PLUS	500VDC
PIN6	PB-	WHITE(白)	ENCODER B MINUS	100MOHM(500VDC)
INDUCTANCE / PHASE: MH ± 20%		SHIELDED	SHIELDED	MAX0.025MM(LOAD450G)
DC RESISTANCE: Ω ± 10%		NC	NC	MAX0.075MM(LOAD920G)
HOLDING TORQUE: N.M		NC	AXIAL PLAY	
INERTIA: KG.CM2		NC	RADIAL PLAY	
WEIGHT: KGS		NC	INSULATION CLASSE	B

SPECIFICATION

CURRENT / PHASE: A	4	比例	1:1	日期	产品型号
INDUCTANCE / PHASE: MH ± 20%	16.5	视图方向	混合步进伺服		86J12126EC-1000-60-HJ
HOLDING TORQUE: N.M	7.8	产品系列			深圳市杰美康机电有限公司
INERTIA: KG.CM2	3.3	绘图			Shenzhen Just Motion Control
WEIGHT: KGS	4.5	审核			Electromechanics Co., LTD

公司名称: 深圳市杰美康机电有限公司
 公司网址: www.jmc-motion.com